

# Bullseye Rapid-Set Safe Deposit Lock


Interchangeable with most 3175 Series  
and all 5700 Series locks



1-800-364-4899 [bullseyesdlocks.com](http://bullseyesdlocks.com)



3175 Series locks

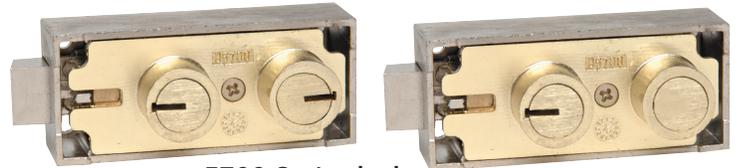

5700 Series locks

## Lock Description

The 3175 Rapid-Set lock is a service replacement lock manufactured with the guard lever biting set to NEUTRAL. The lock, as received from the factory, will operate with a Neutral Guard Key, until the guard lever biting sequence is "set" at the installation site to an active guard key. (See "SERVICE" section below.) The 3175 Rapid-Set lock can be "set" to any existing 3175 and most existing FLAT 5700 guard key biting sequences, provided the biting sequence is factory cut on a corrugated 3175 GUARD KEY BLANK. The lock can be "set" only once (unless all the guard levers are manually reset to the neutral position). Once the lock is "set" to an active guard key, the Neutral Guard Key will no longer operate the lock.

## Guard Key Information

It is necessary that the guard key used on service replacement 3175 locks be factory cut. A replacement 3175 guard key, if needed, is ordered separately from the 3175 lock.

The 3175 guard key is equipped with a "tail" at the end of the key that enters the guard post in the back of the lock case, which prevents "rocking" of the guard key and ensures that the guard key properly engages with the Rapid-Set levers. Later production 3175 guard keys are corrugated. (After 1974 Rapid-Set lock were manufactured with a unique corrugation in the guard keyway. The guard slot is flat, but has a "bump" to restrict the insertion of a non-corrugated key.)

An existing 5700 guard key can be readily matched with a 3175 guard key if its serial number begins with "0." Example: 01082. A 5700 guard key NOT beginning with "0" can be matched, provided no part of the black band in the silhouette "5700

GUARD KEY" can be seen when the existing guard key is placed over the silhouette. Be certain to align the warding notch on the key with the notch on the silhouette. In the few instances where a 5700 lock operates to a guard key that cannot be matched, it cannot be replaced with a 3175 lock.

## Service Instructions (Setting the Lock)

3175 Rapid-Set locks are not to be repaired. Any 3175 lock requiring forced opening should be discarded and replaced. 3175 locks will also directly interchange with 5700 series locks ( Provided the 5700 guard keys meet on of the specifications listed above). Since the 3175 locks are set to neutral when received for service replacement, the following procedure must be completed to "set" the 3175 lock to an existing guard key.

1. Insert the neutral guard key (Part No. M00417); into the guard nose and turn the key counter-clockwise to stop.
2. Insert the renter key into the renter nose and turn the key clockwise until the lock bolt is fully retracted.
3. Turn the neutral guard key clockwise and remove.
4. Do not remove the renter key - leave the renter key in the unlocked position with the bolt retracted.
5. Insert a factory cut Rapid-Set guard key into the guard nose and turn the key counter-clockwise to stop. Cycle the guard key back and forth through 60 degrees (clockwise and counter-clockwise) three or four times to ensure that the guard levers have been properly set.
6. Remove both keys and then retest the lock several times for proper operation.